



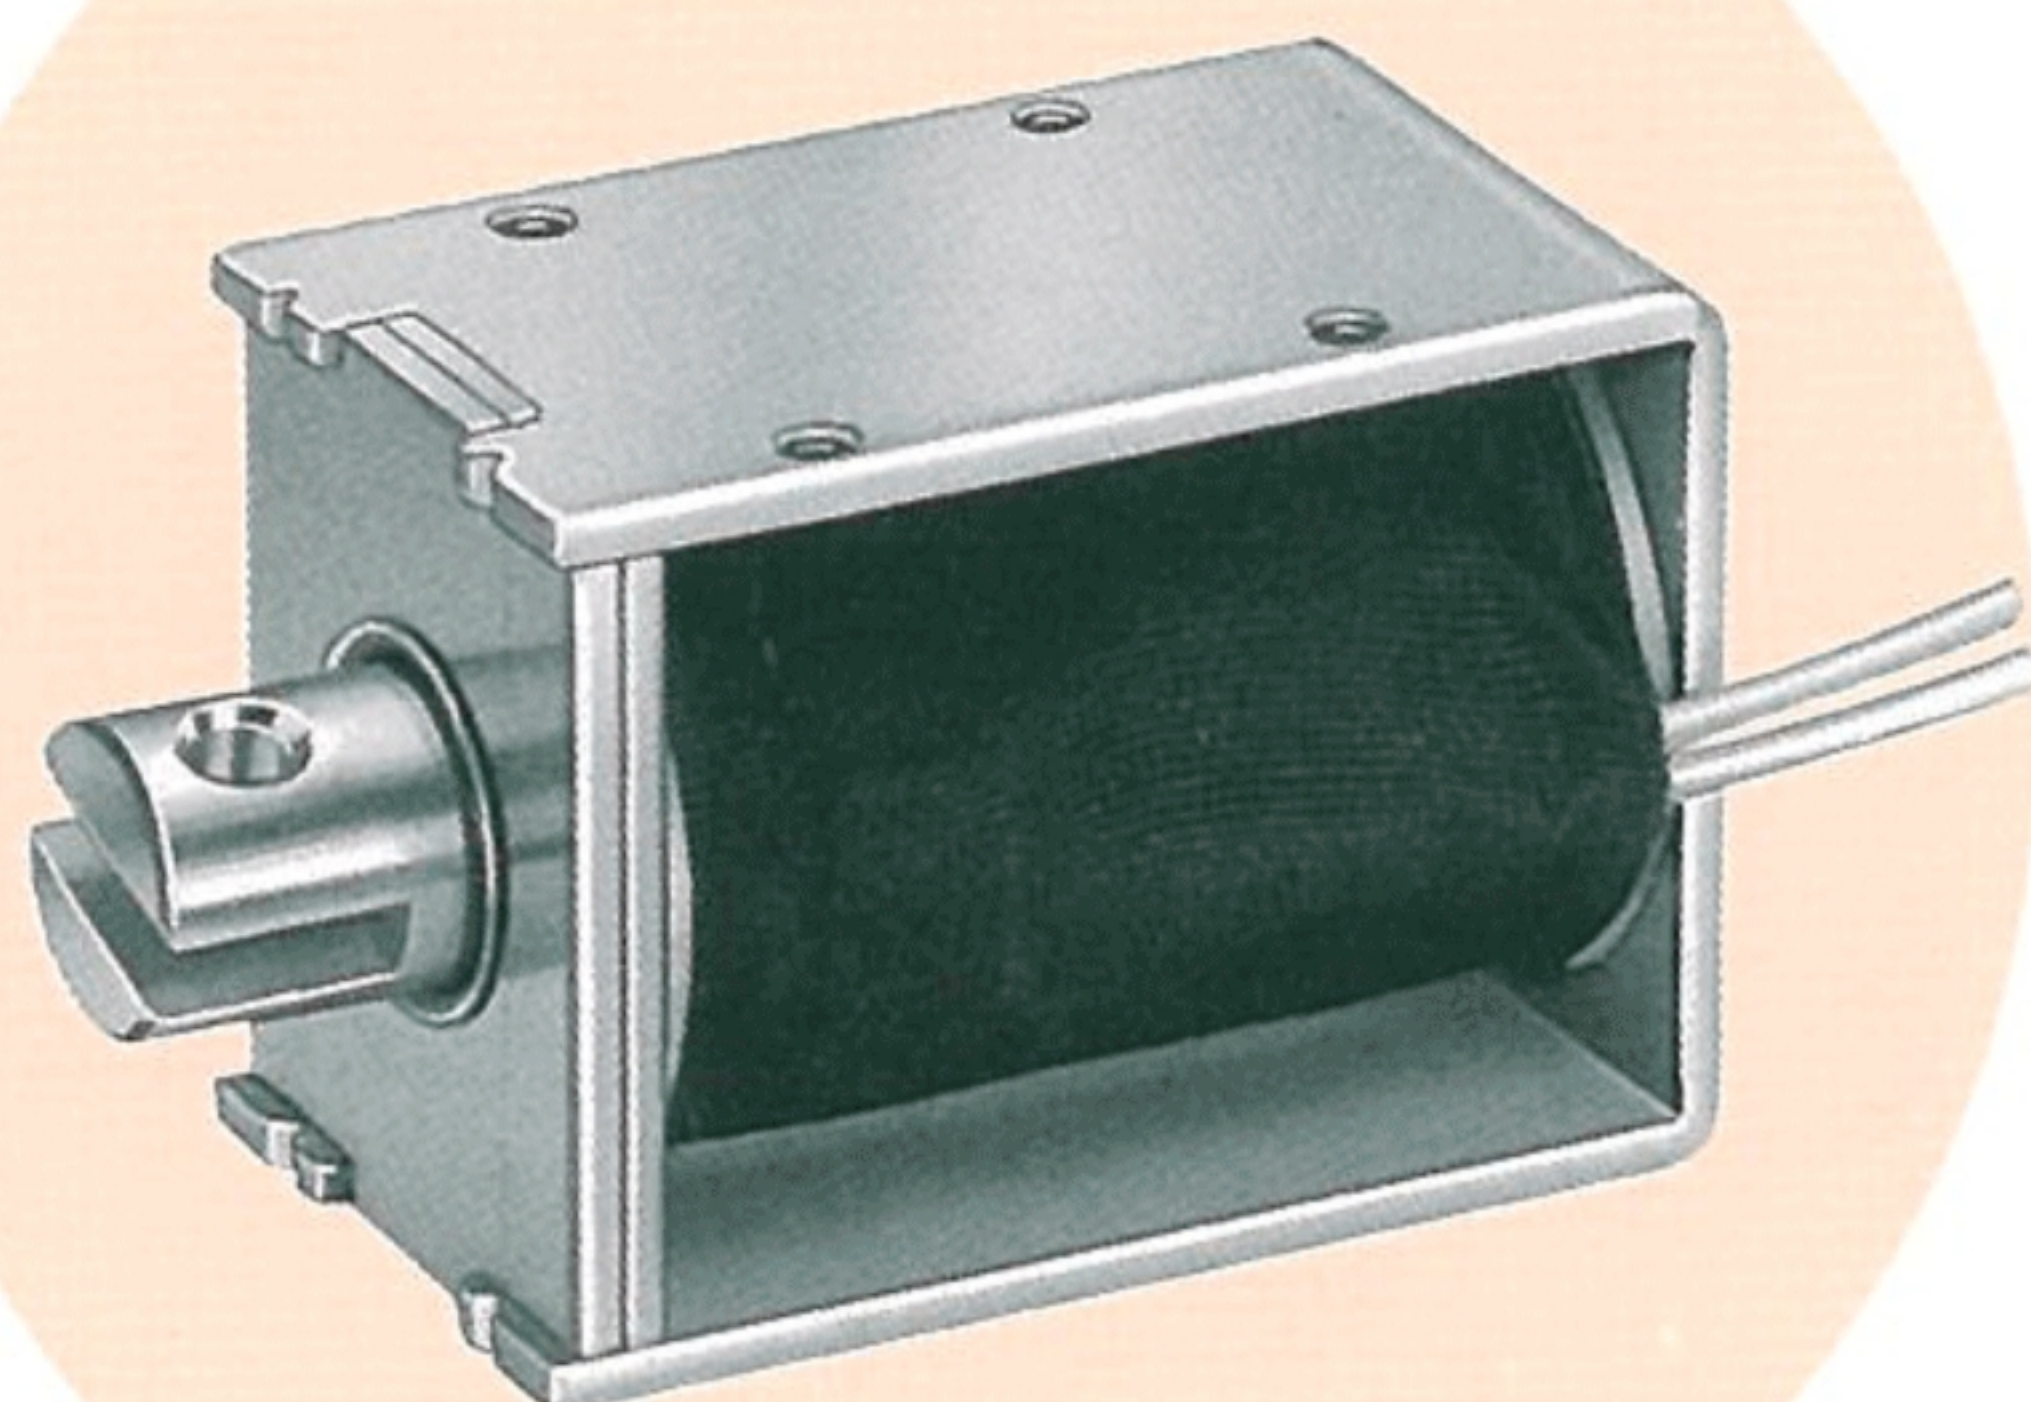


Plunger Weight 可动铁心重量 : 22g
Total Weight 总重量 : 122g

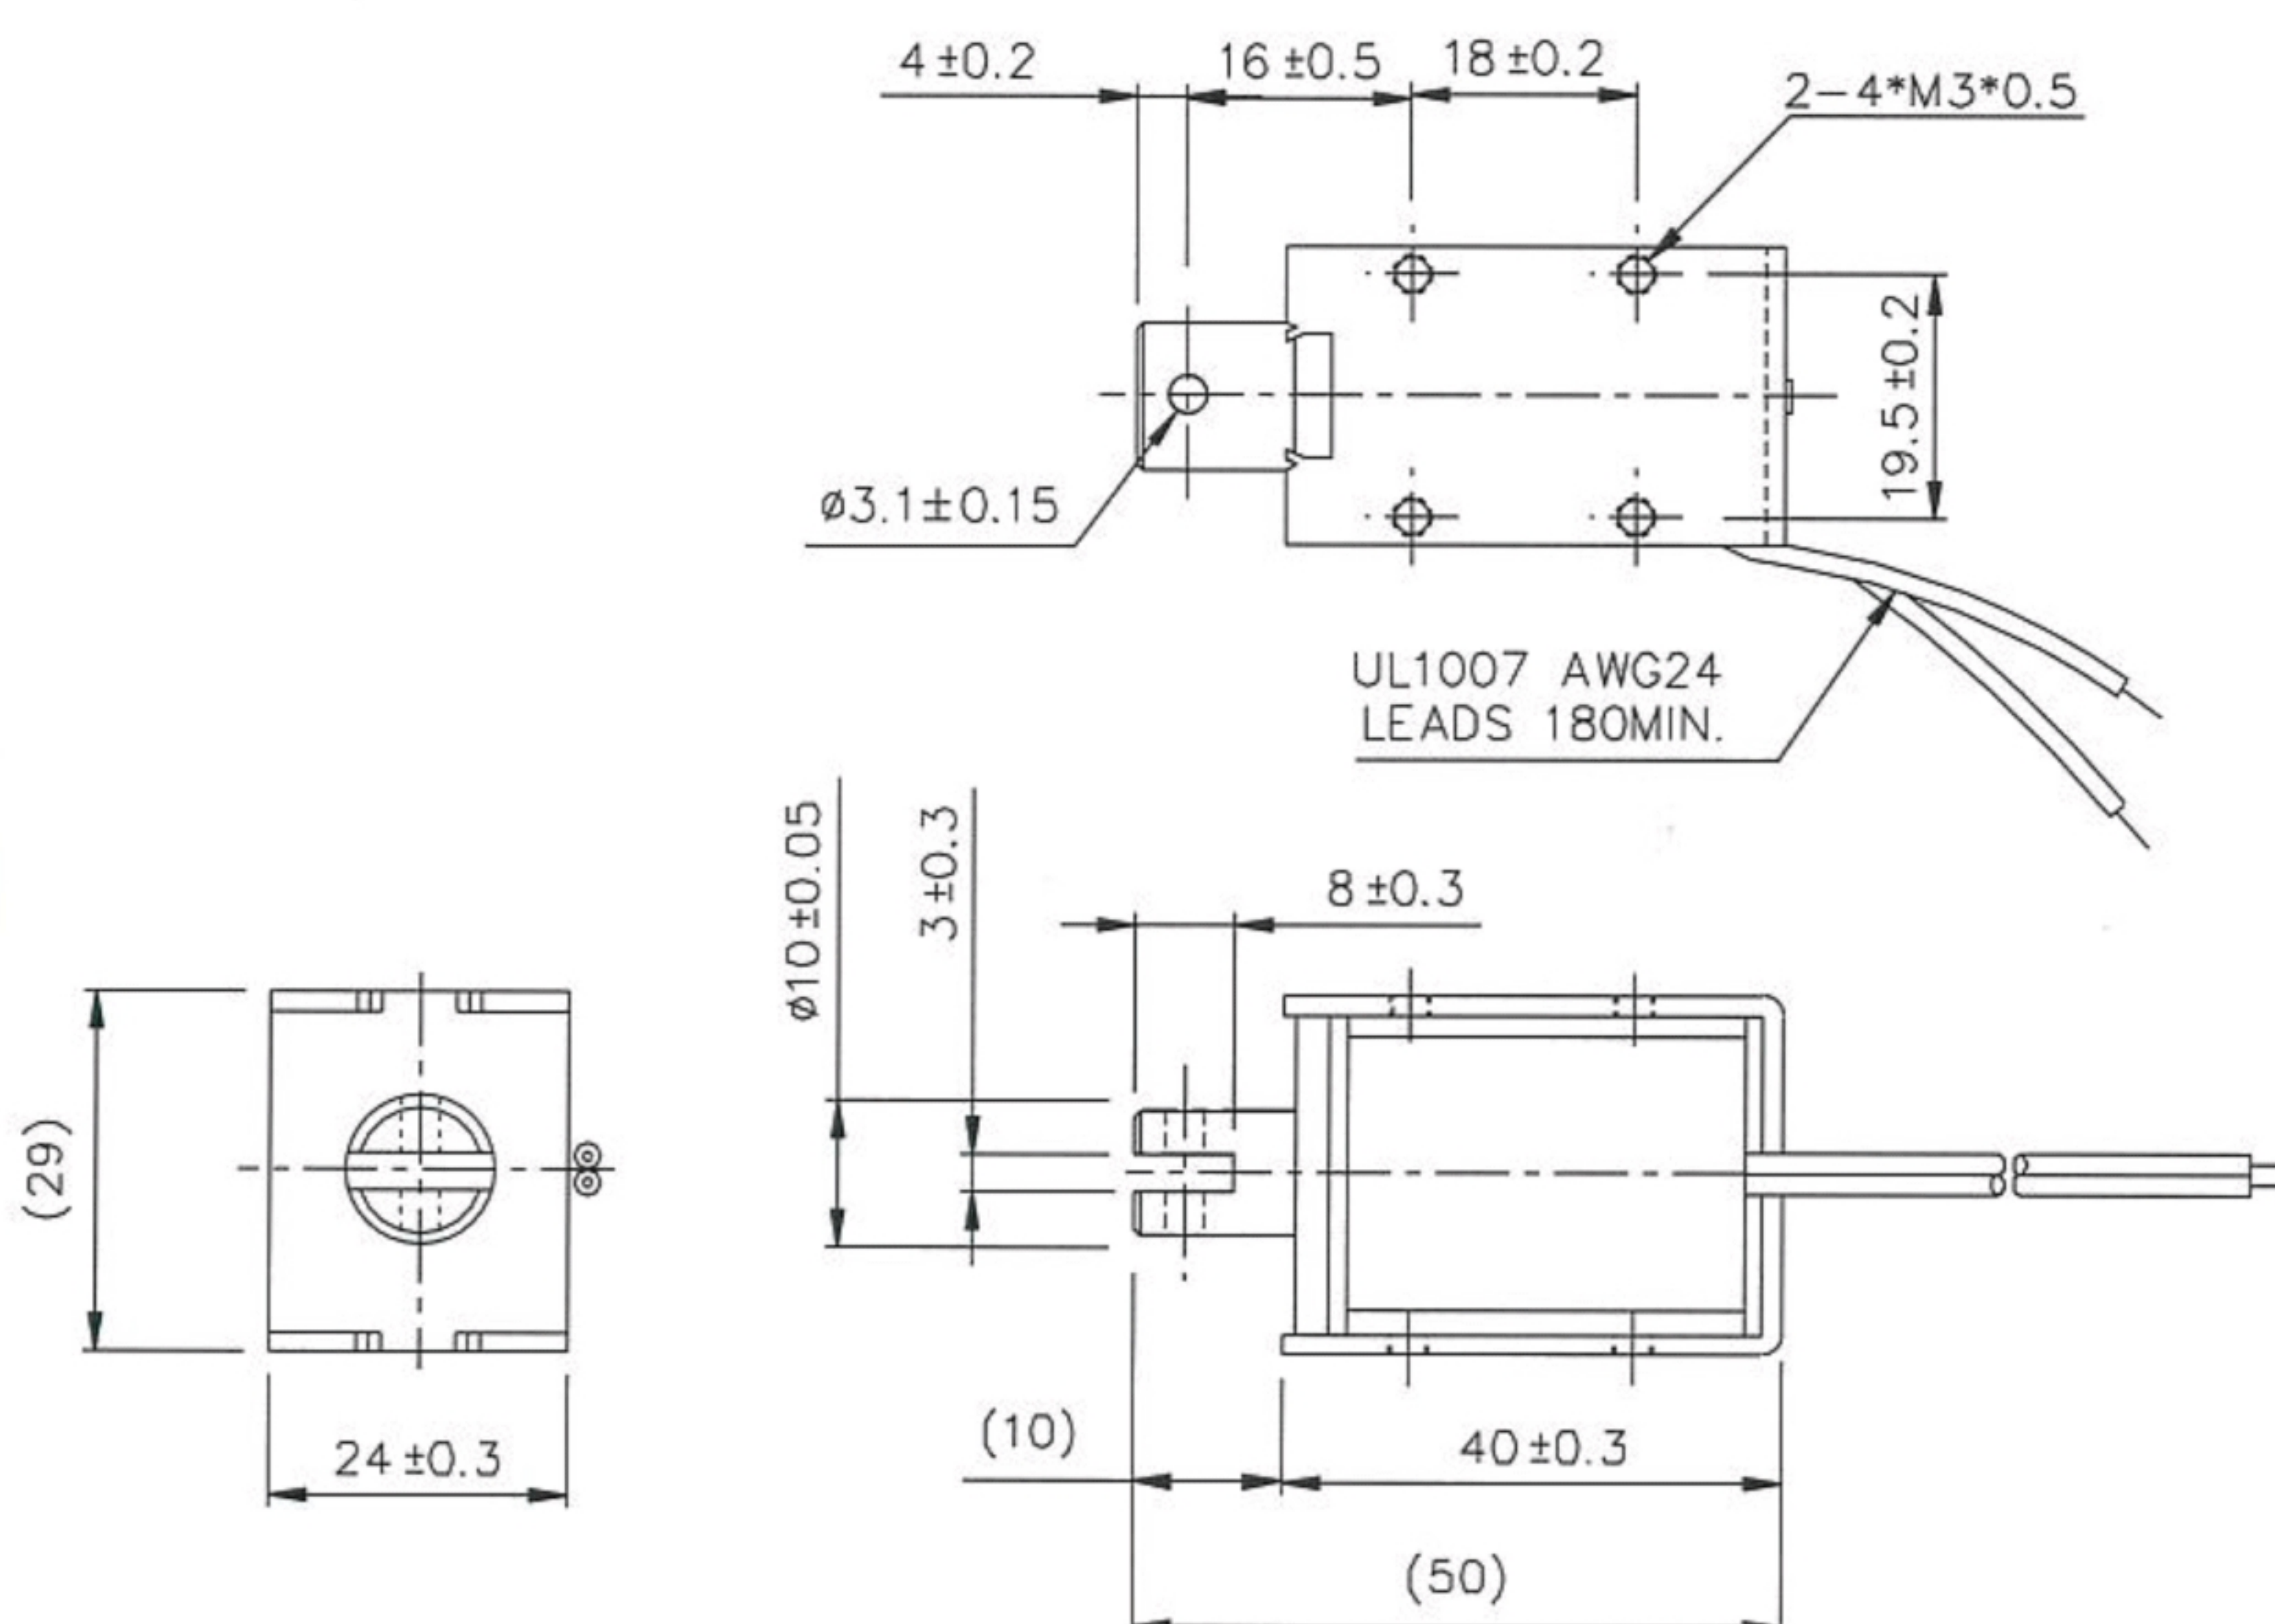


Shown Energized 通电状态 UNIT 单位: mm

STROKE Vs FORCE

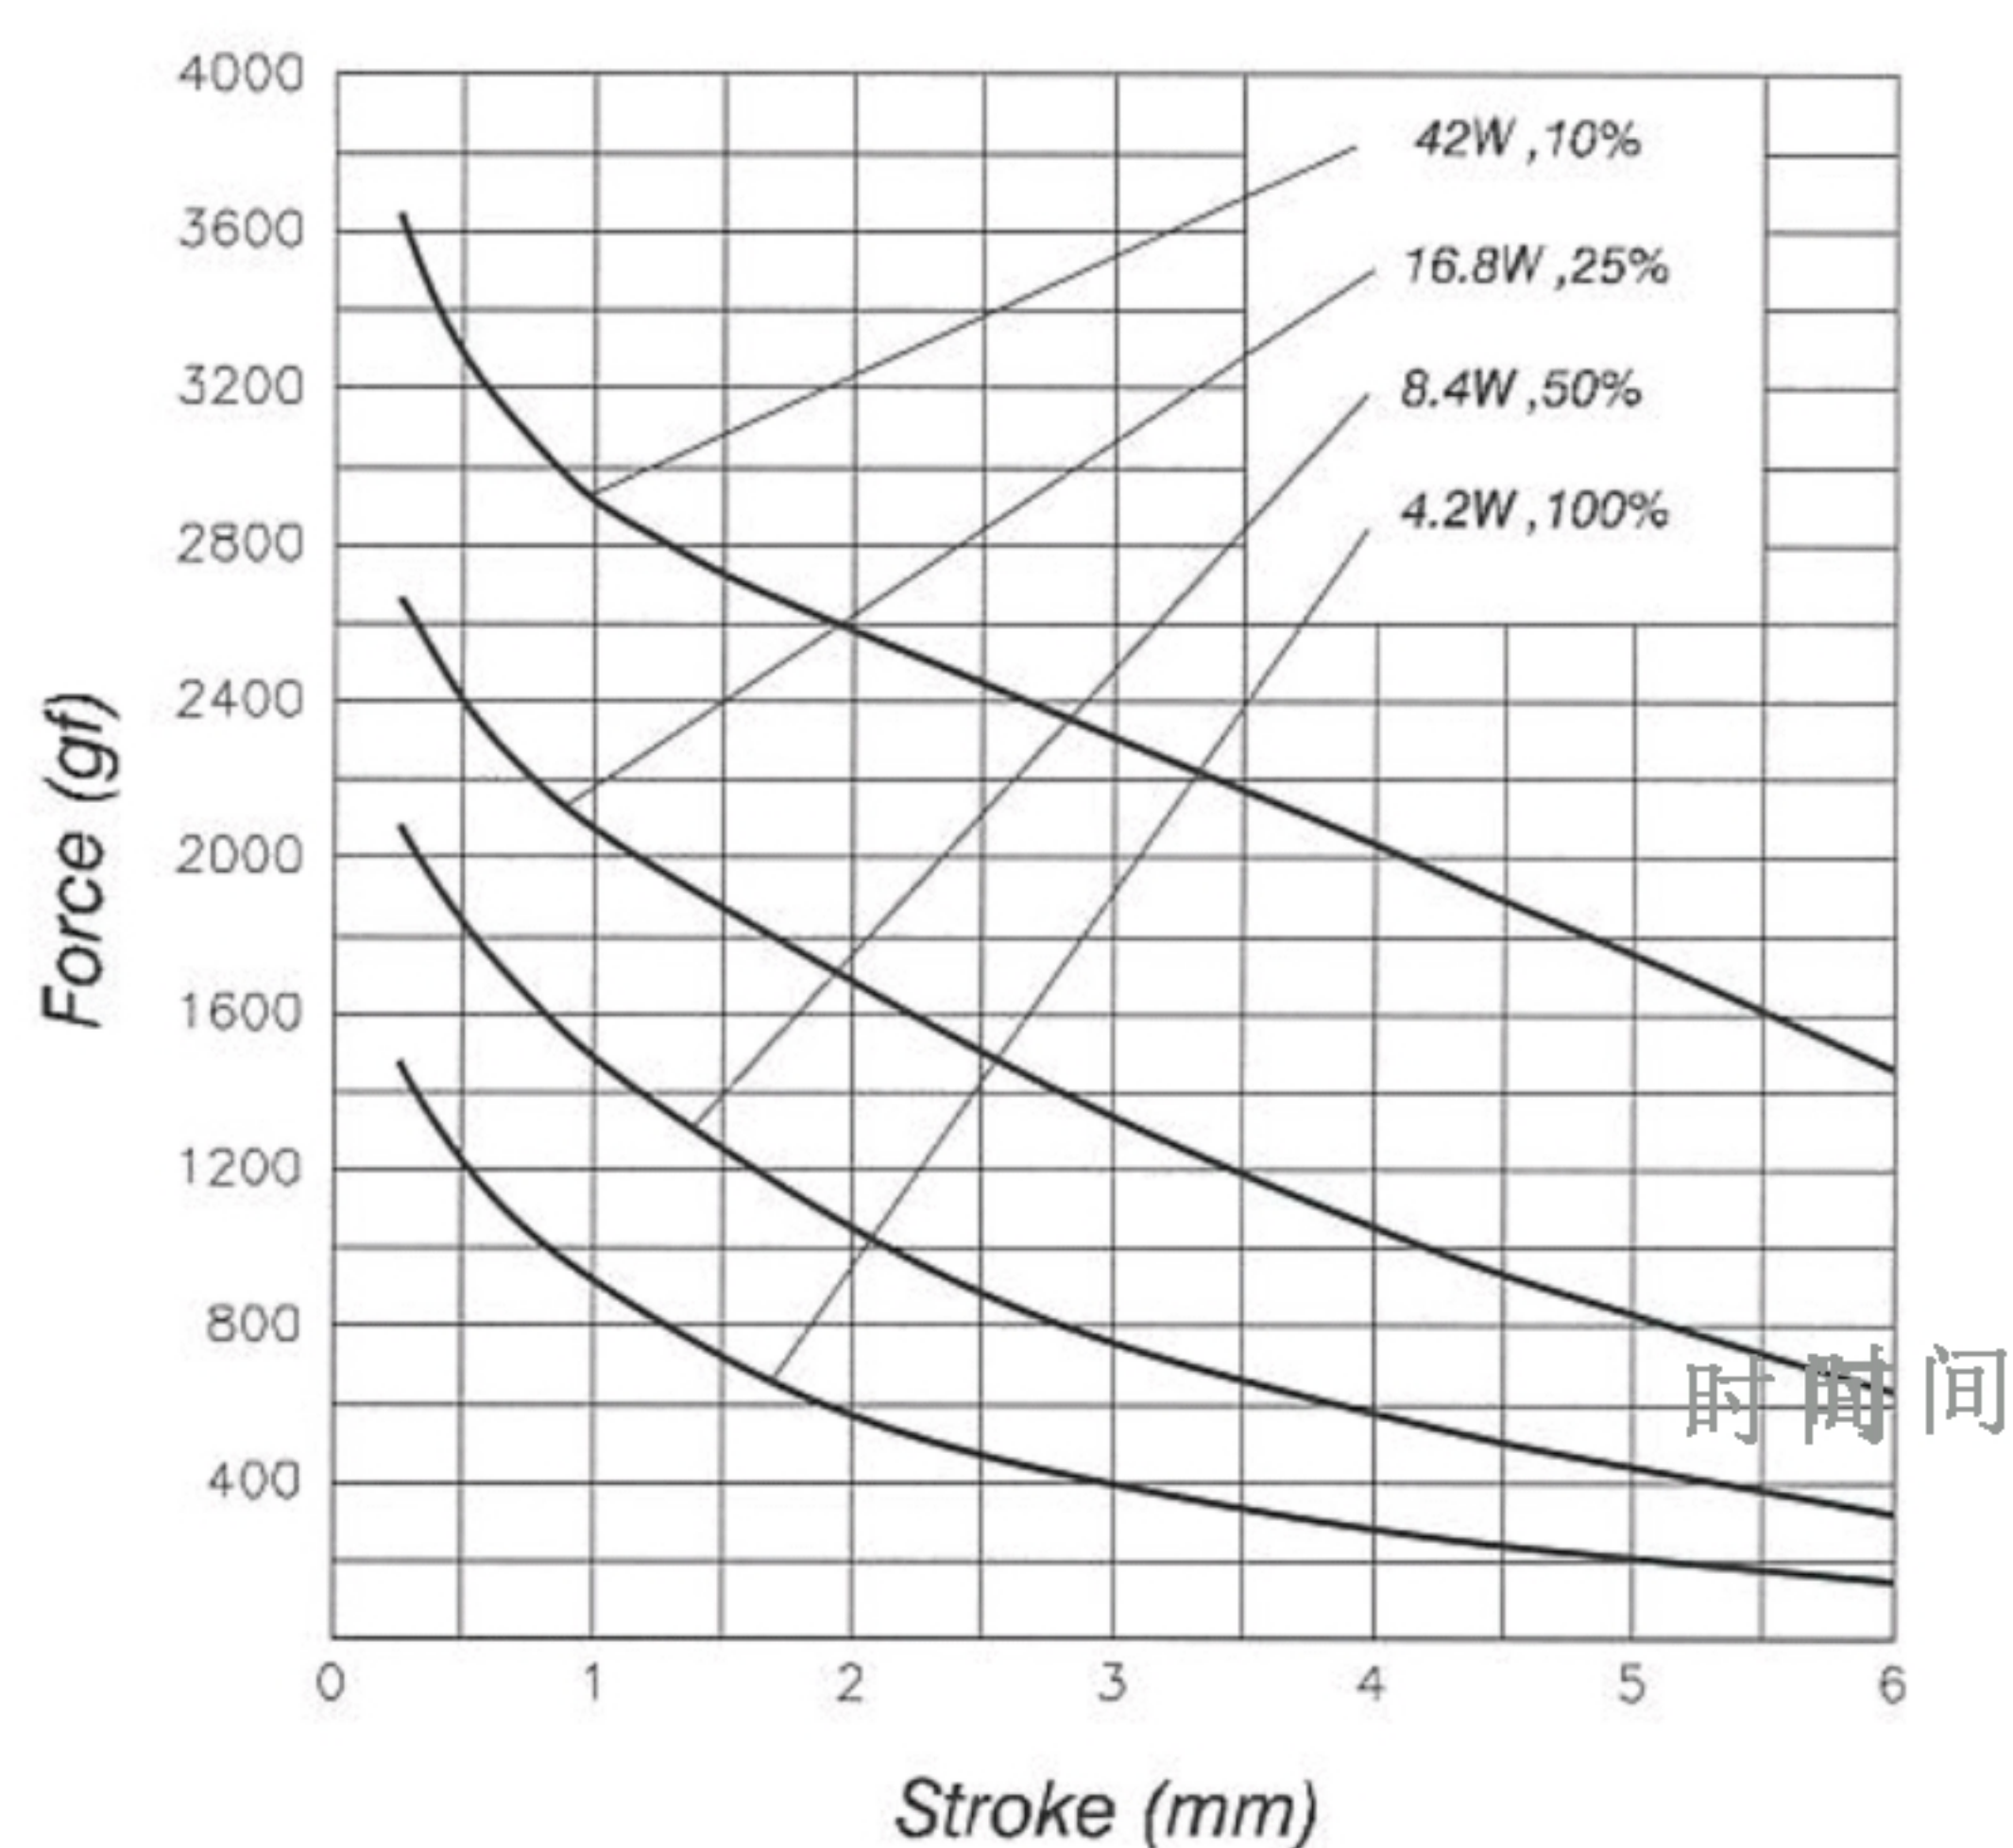

AMPERE-TURNS Vs FORCE
安-匝 / 吸引力

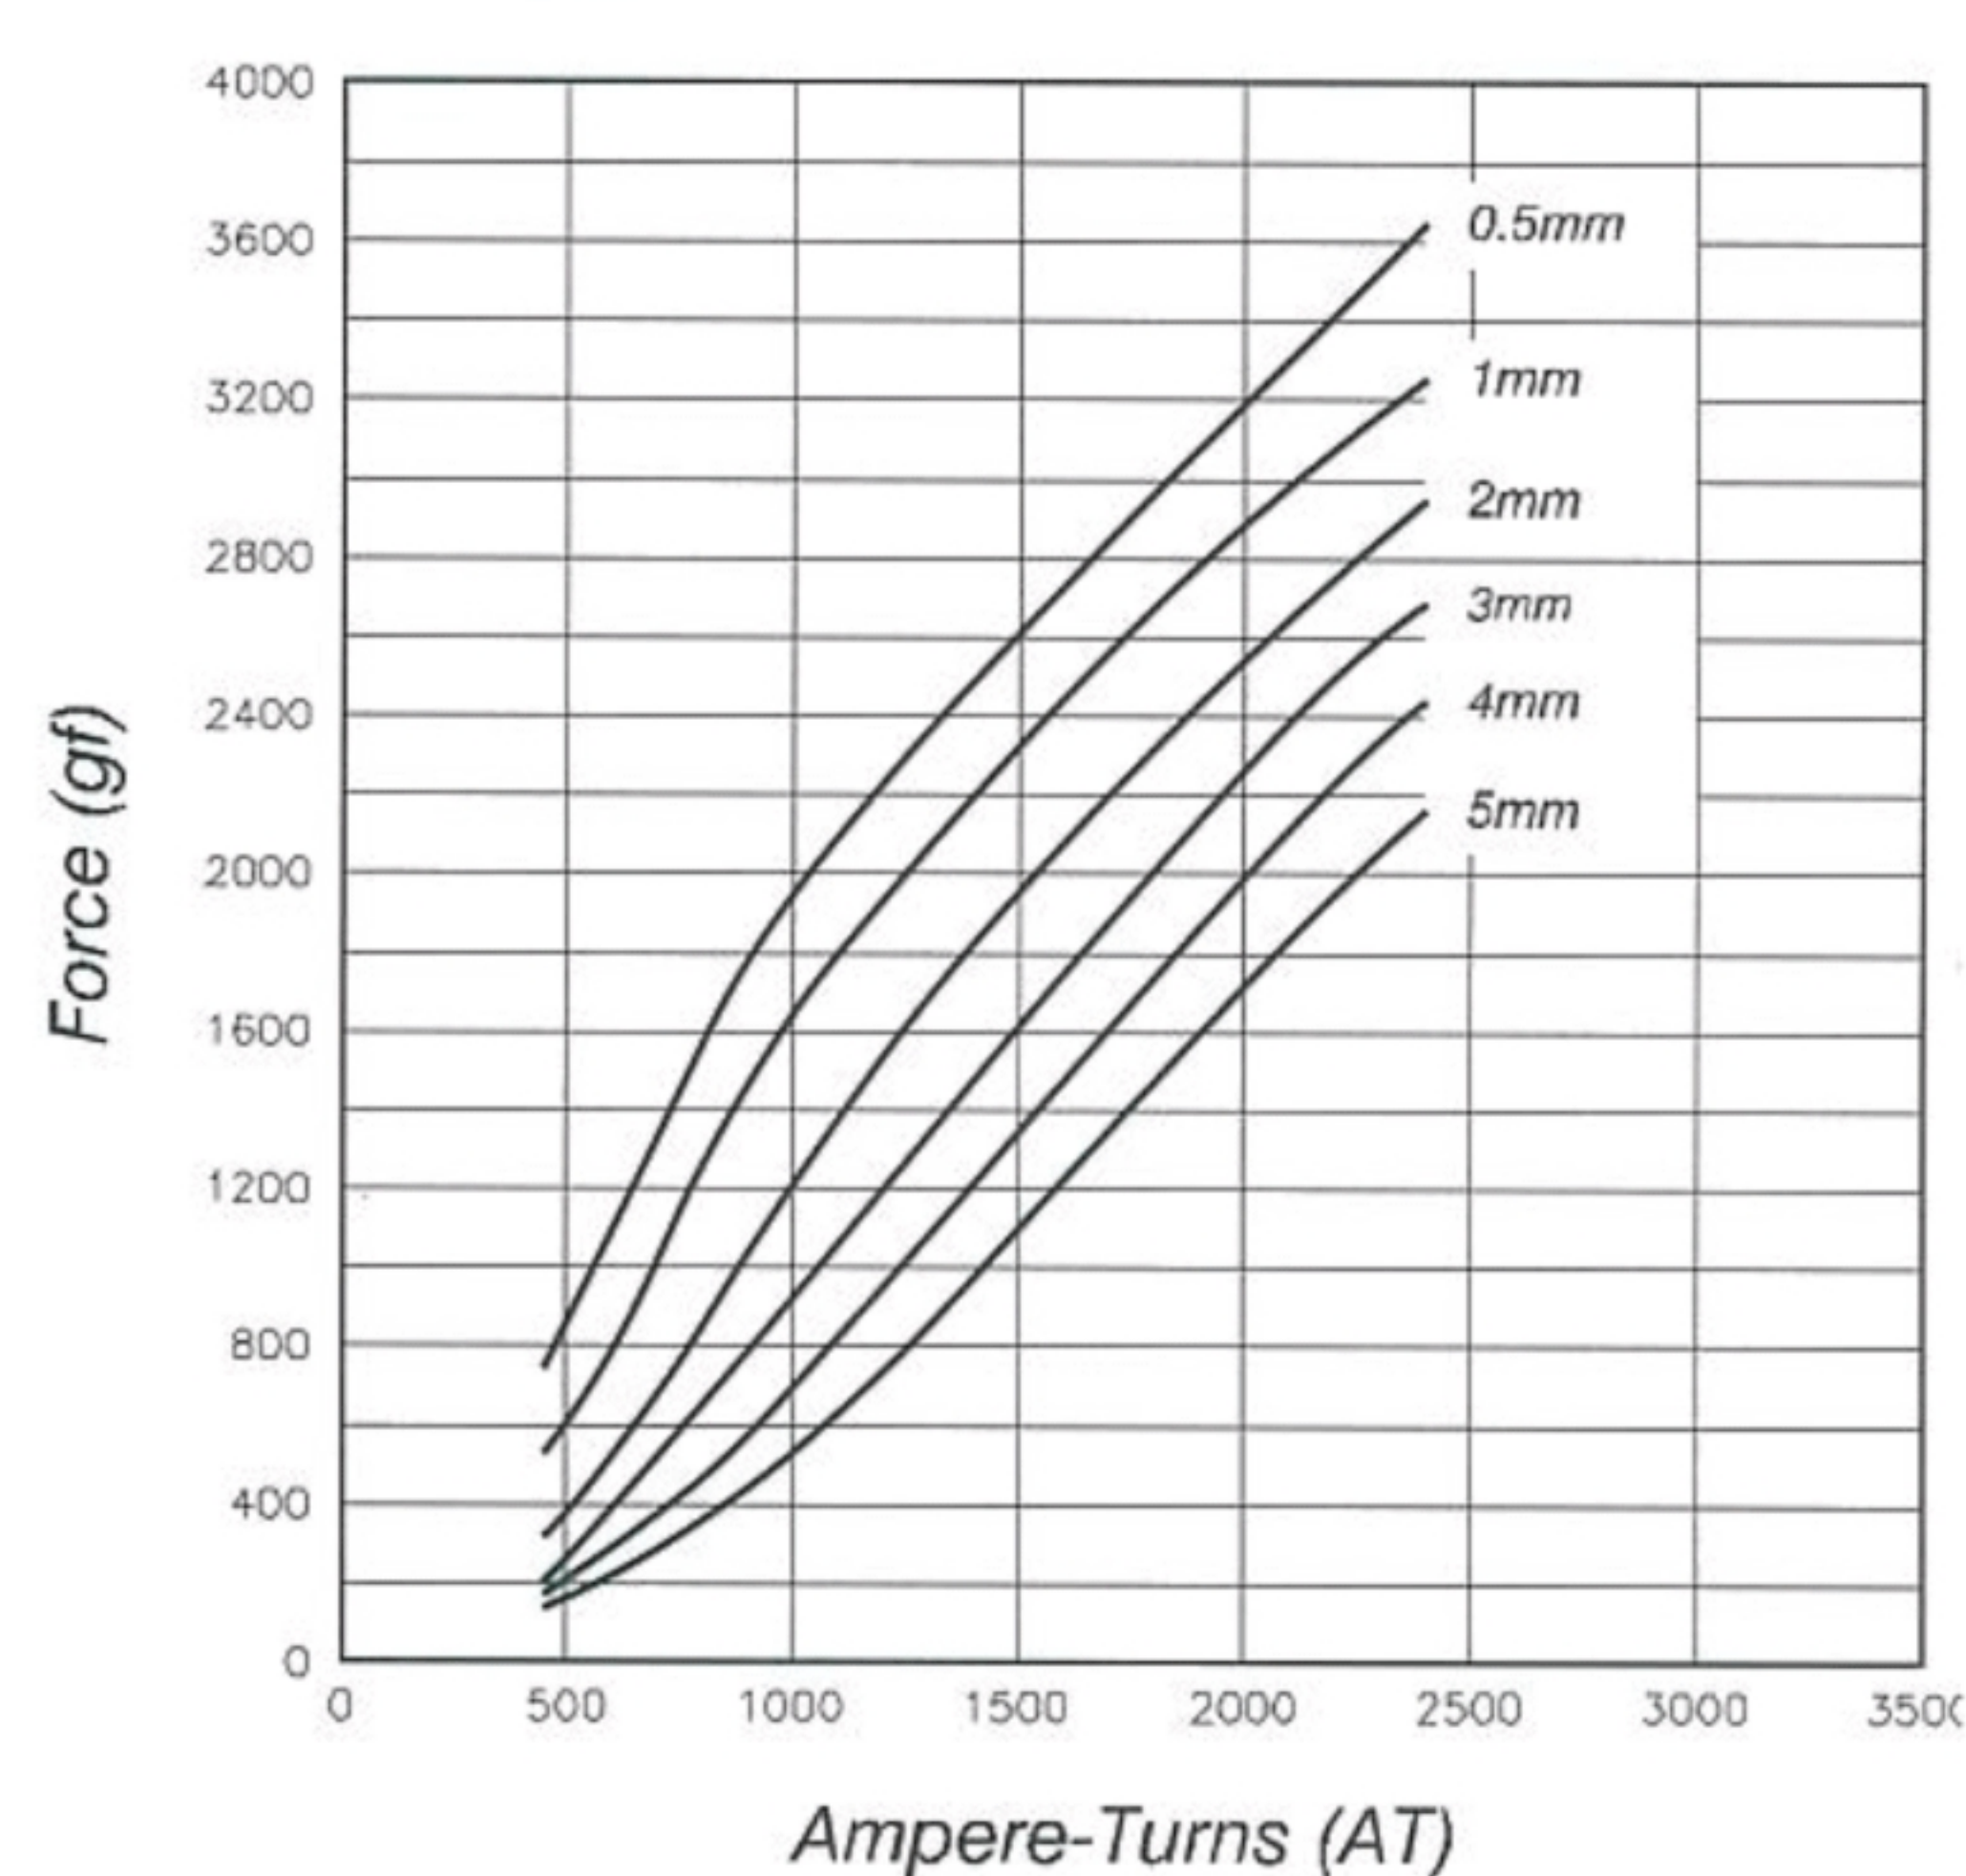

COIL DATA 线圈资料

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$			Continuous (100%)	Or less (50%)	Or less (25%)	Or less (10%)
作动周期(%) = $\frac{\text{ON 时间}}{\text{ON时间+ OFF时间}} \times 100\%$			连续 (100%)	间断 (50%)	间断 (25%)	间断 (10%)
MAX. "on" time in seconds 最大 ON 时间 (秒)			∞	100	36	7
Watts at 20°C 瓦特数(W) (在 20°C)			4.2	8.4	16.8	42
Ampere-turns at 20°C AT 值 (在 20°C)			655	925	1310	2075
Type no.	Resistance (20°C) $\Omega \pm 10\%$	No. turns	Volts DC 电 压			
型 号	阻 值(Ω) $\pm 10\%$	绕线圈数				
HTO-1040S06AA	8.6	930	6	8.5	12	19
HTO-1040S12AA	34	1900	12	17	24	38
HTO-1040S24AA	137	3690	24	34	48	76
HTO-1040S48AA	548	7590	48	68	96	152