



型号/Type no: HTO-1564L

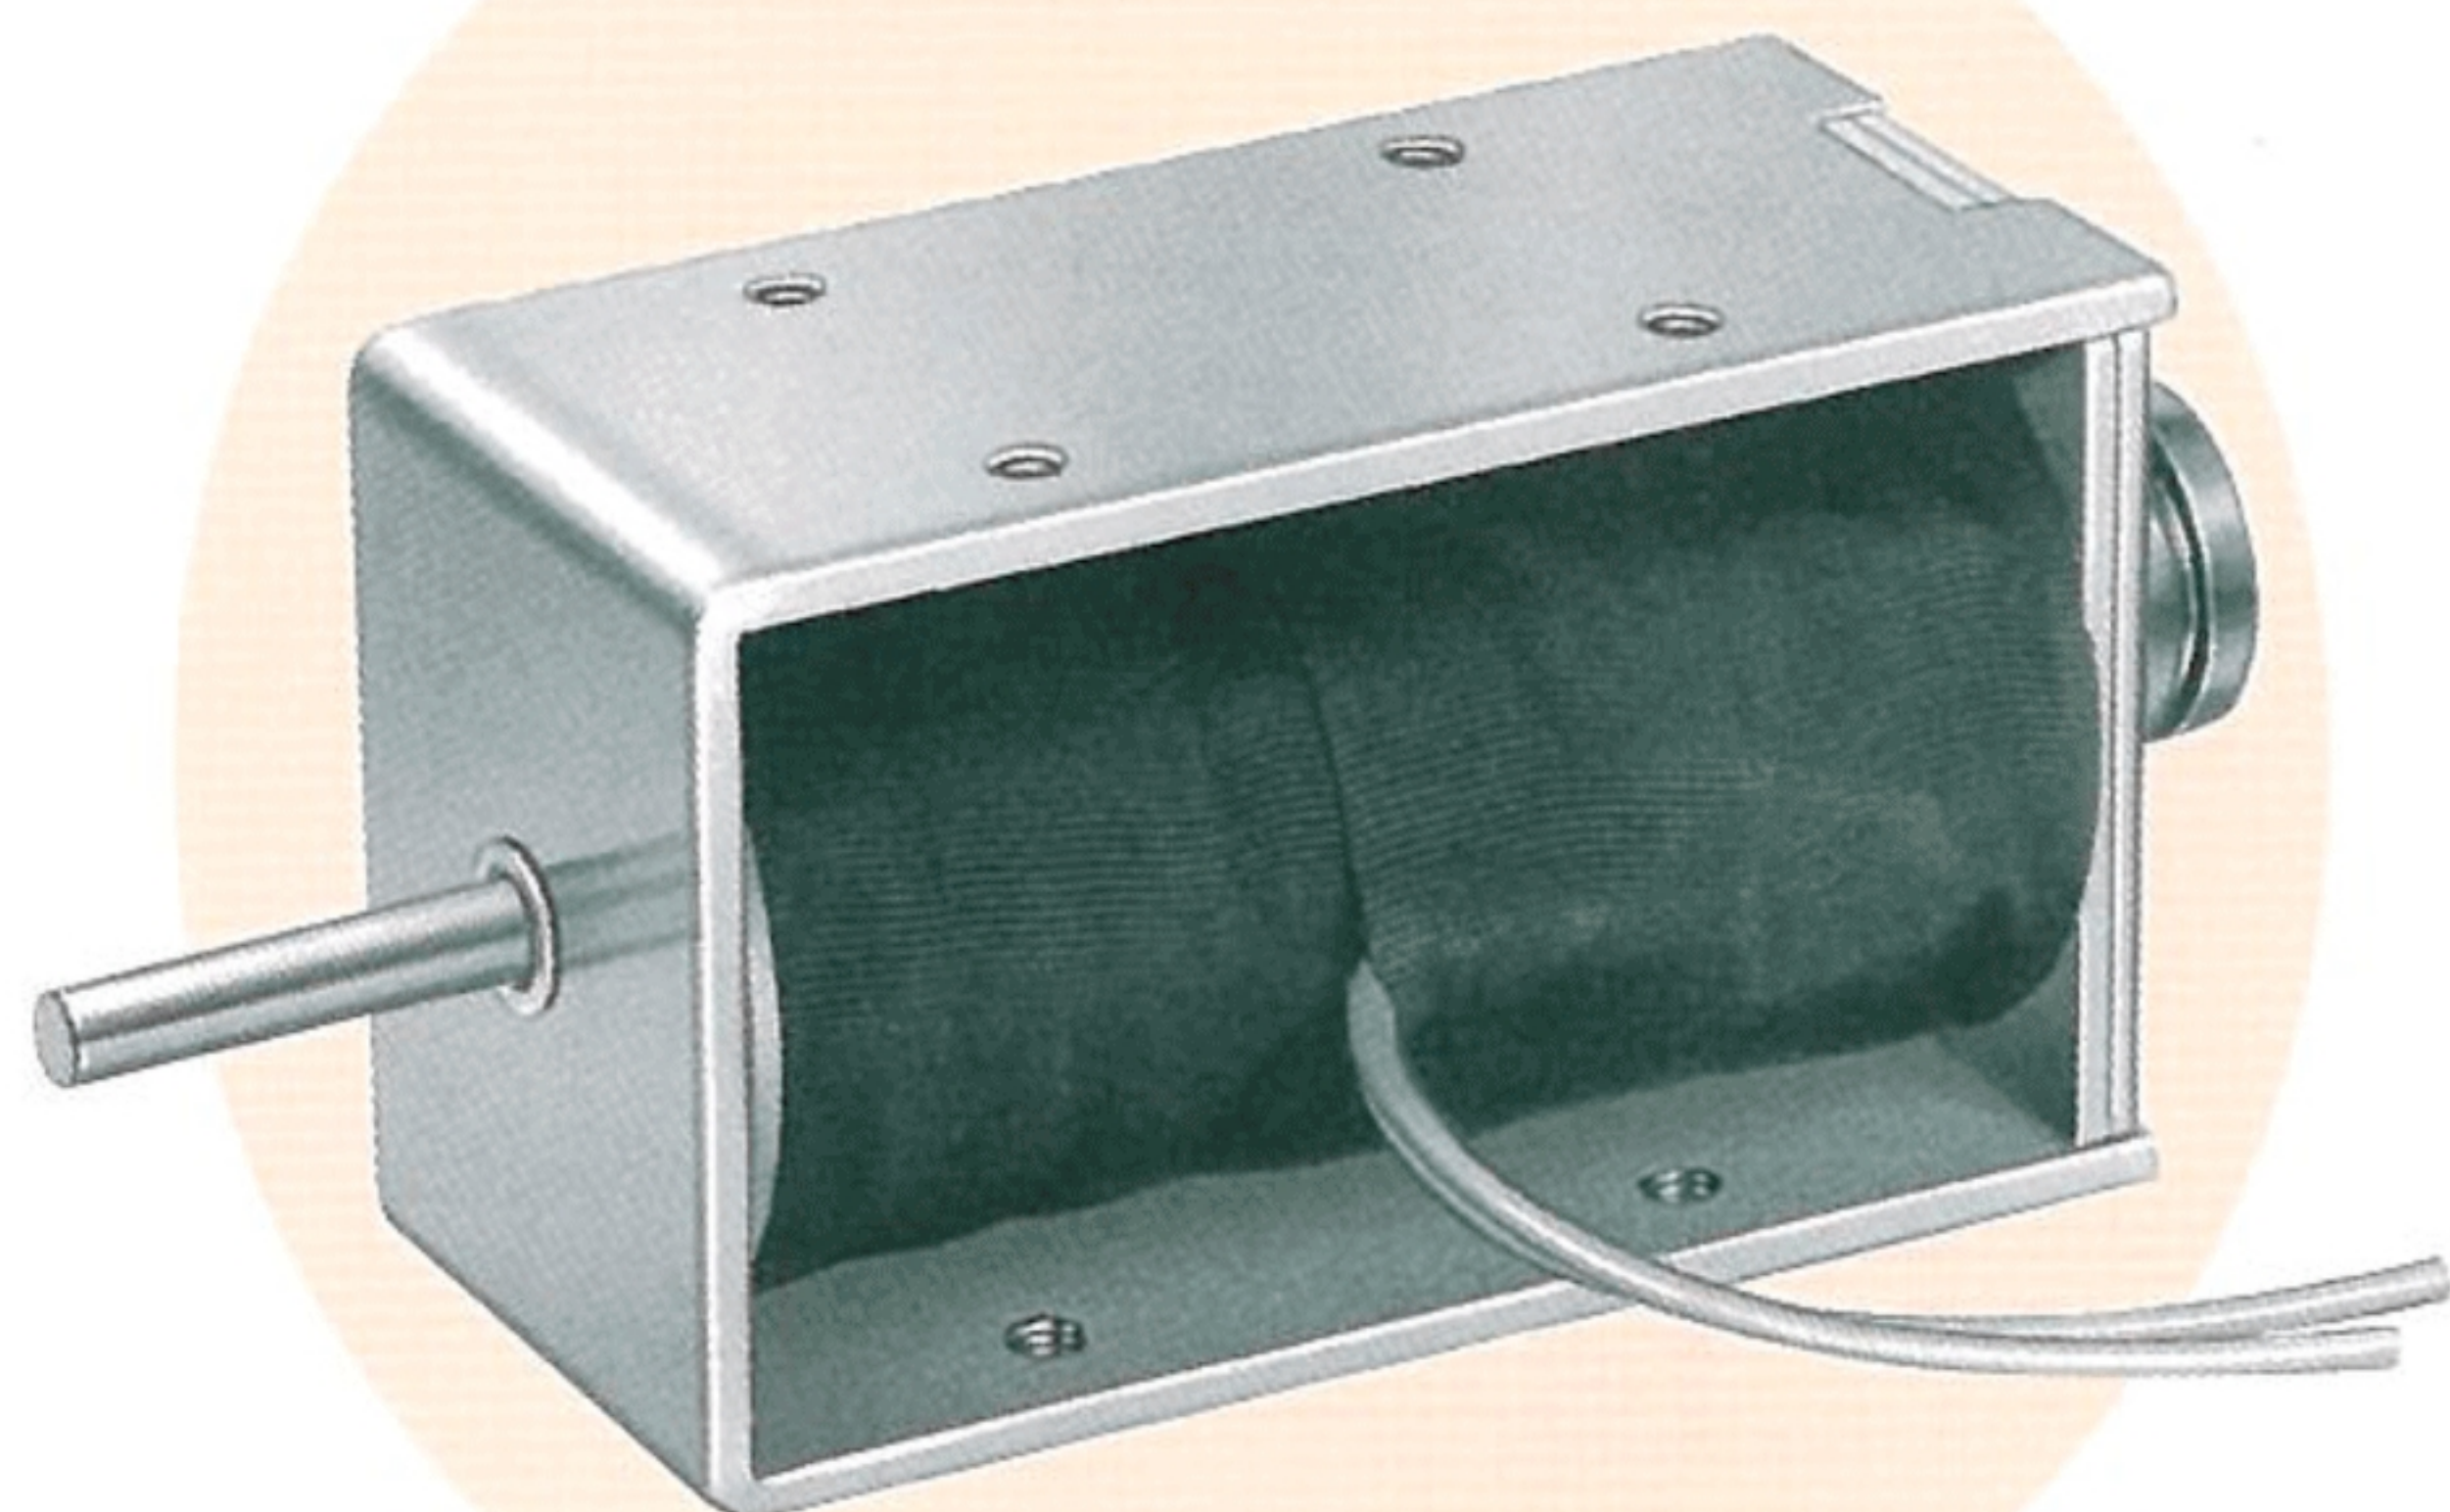


Plunger Weight 可动铁心重量 : 71g
Total Weight 总重量 : 363g

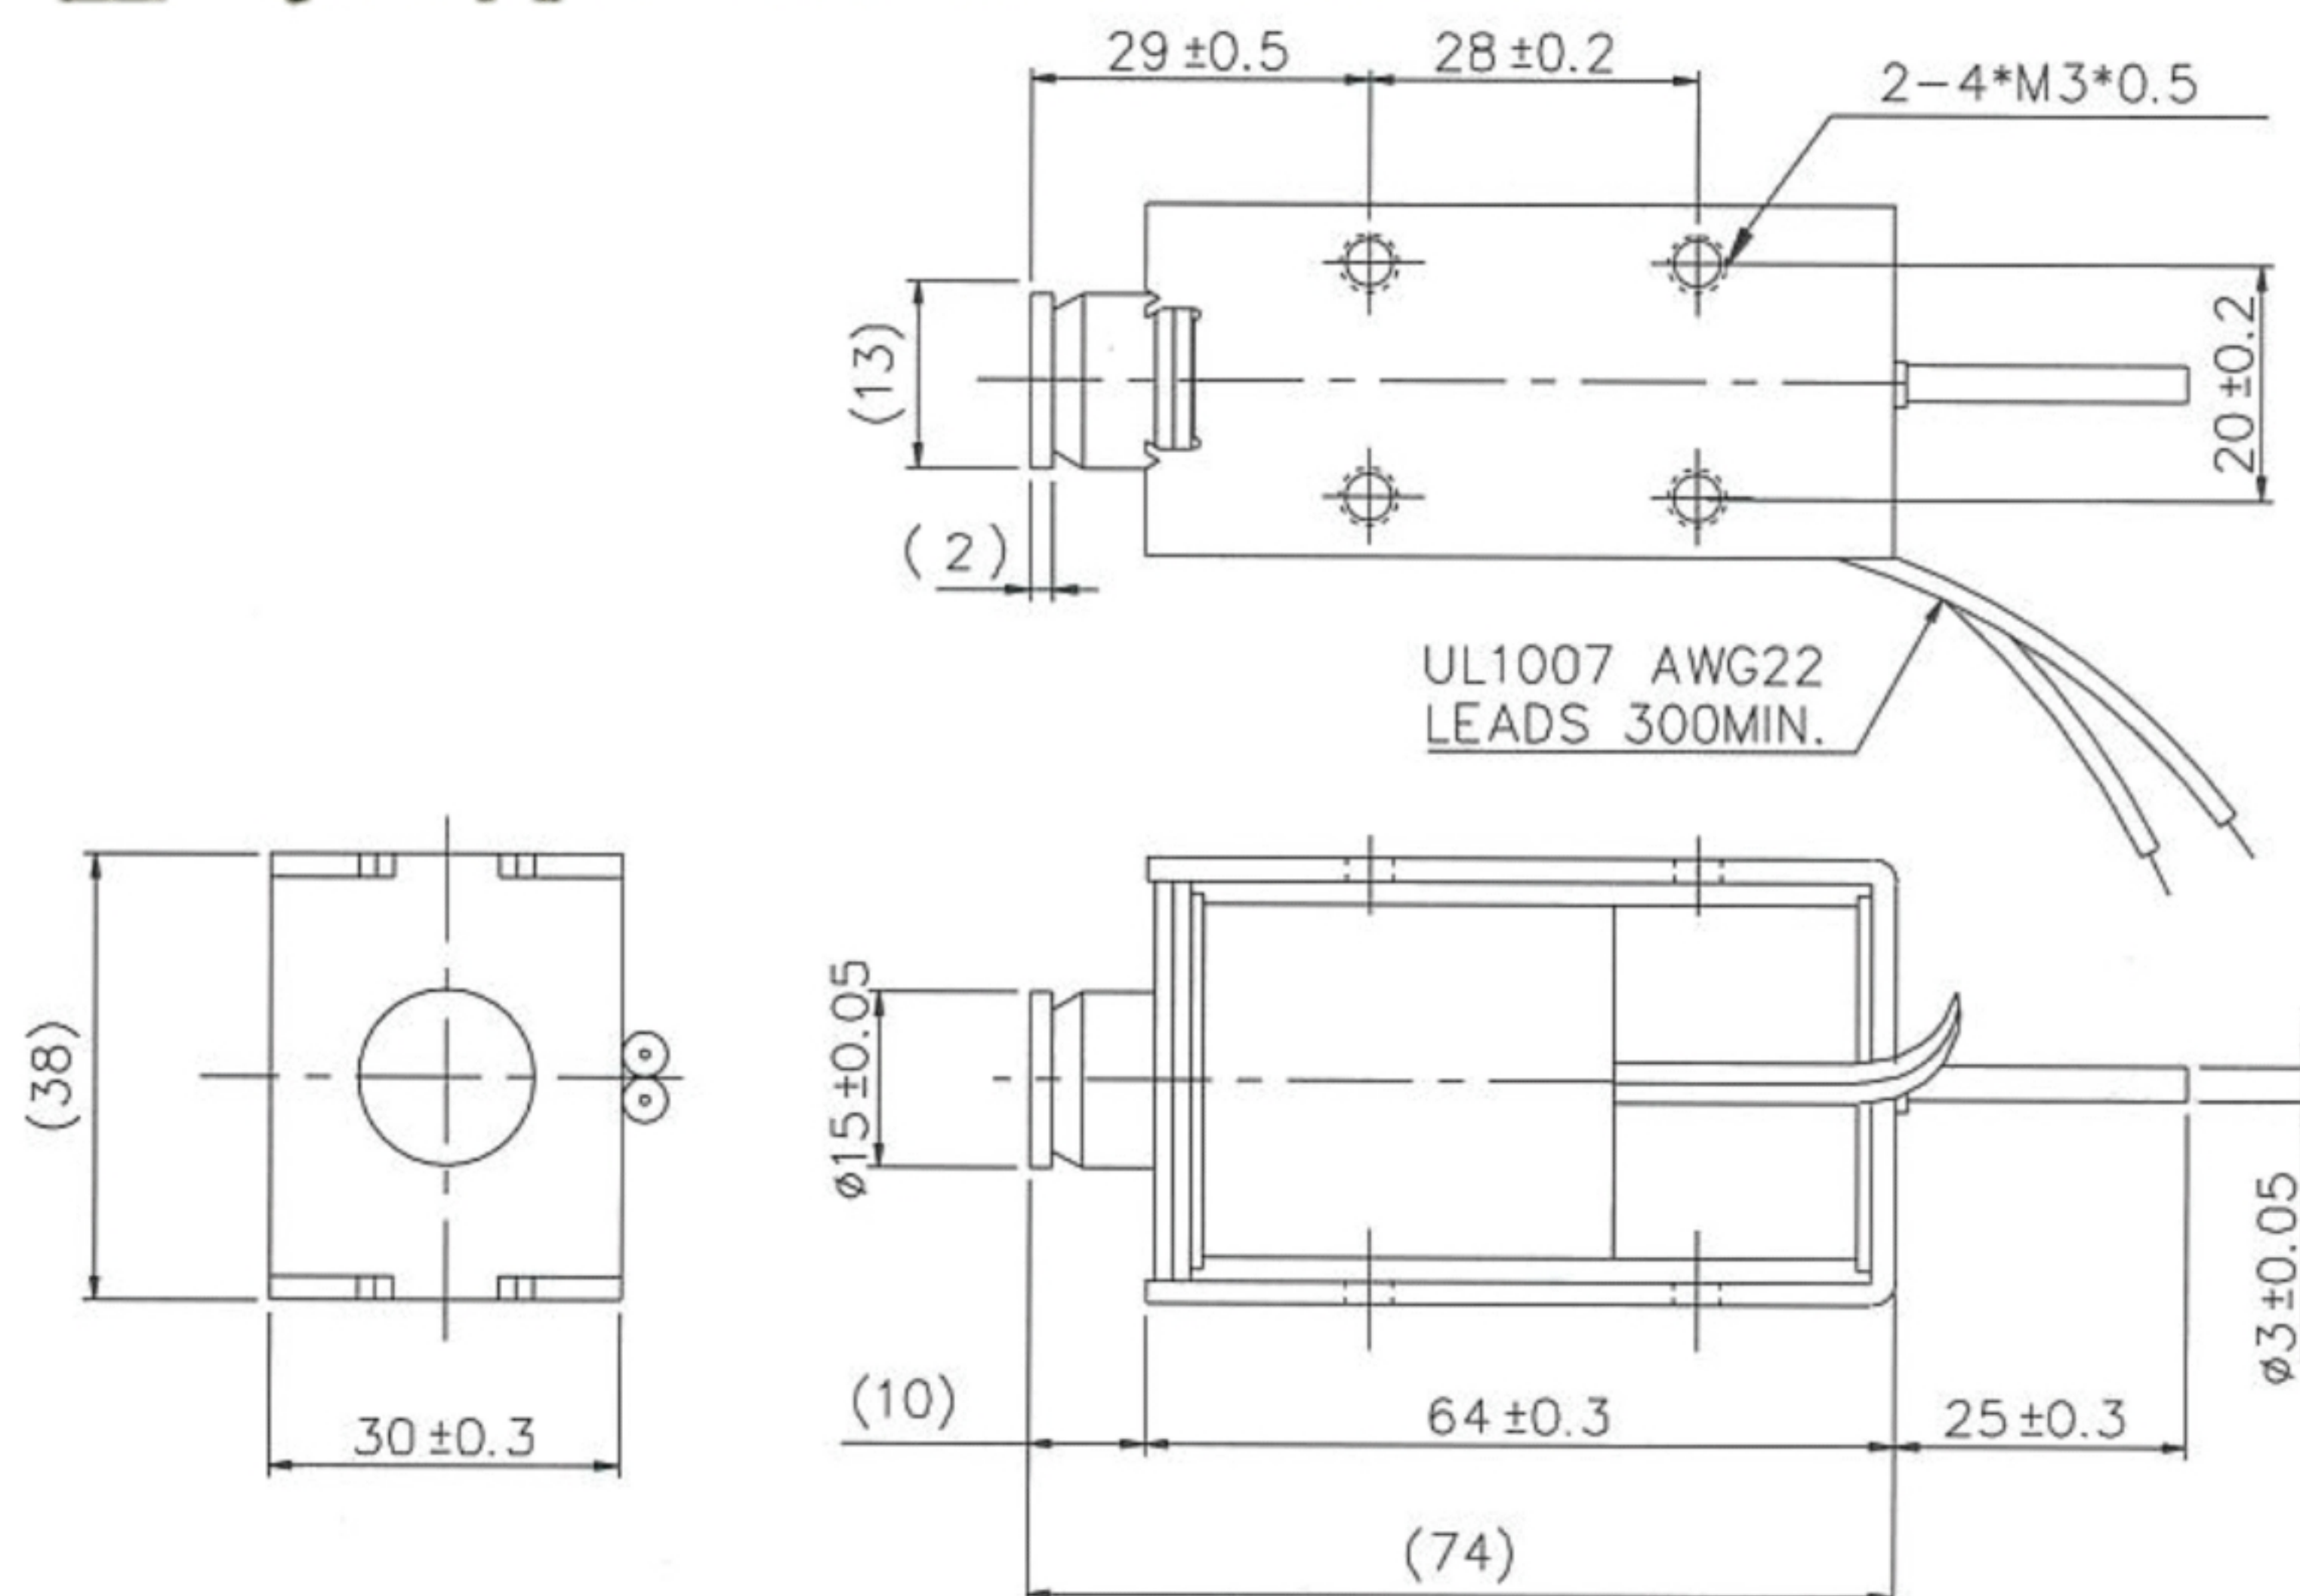


Shown Energized 通电状态 UNIT 单位: mm

STROKE Vs FORCE 行程 / 吸引力

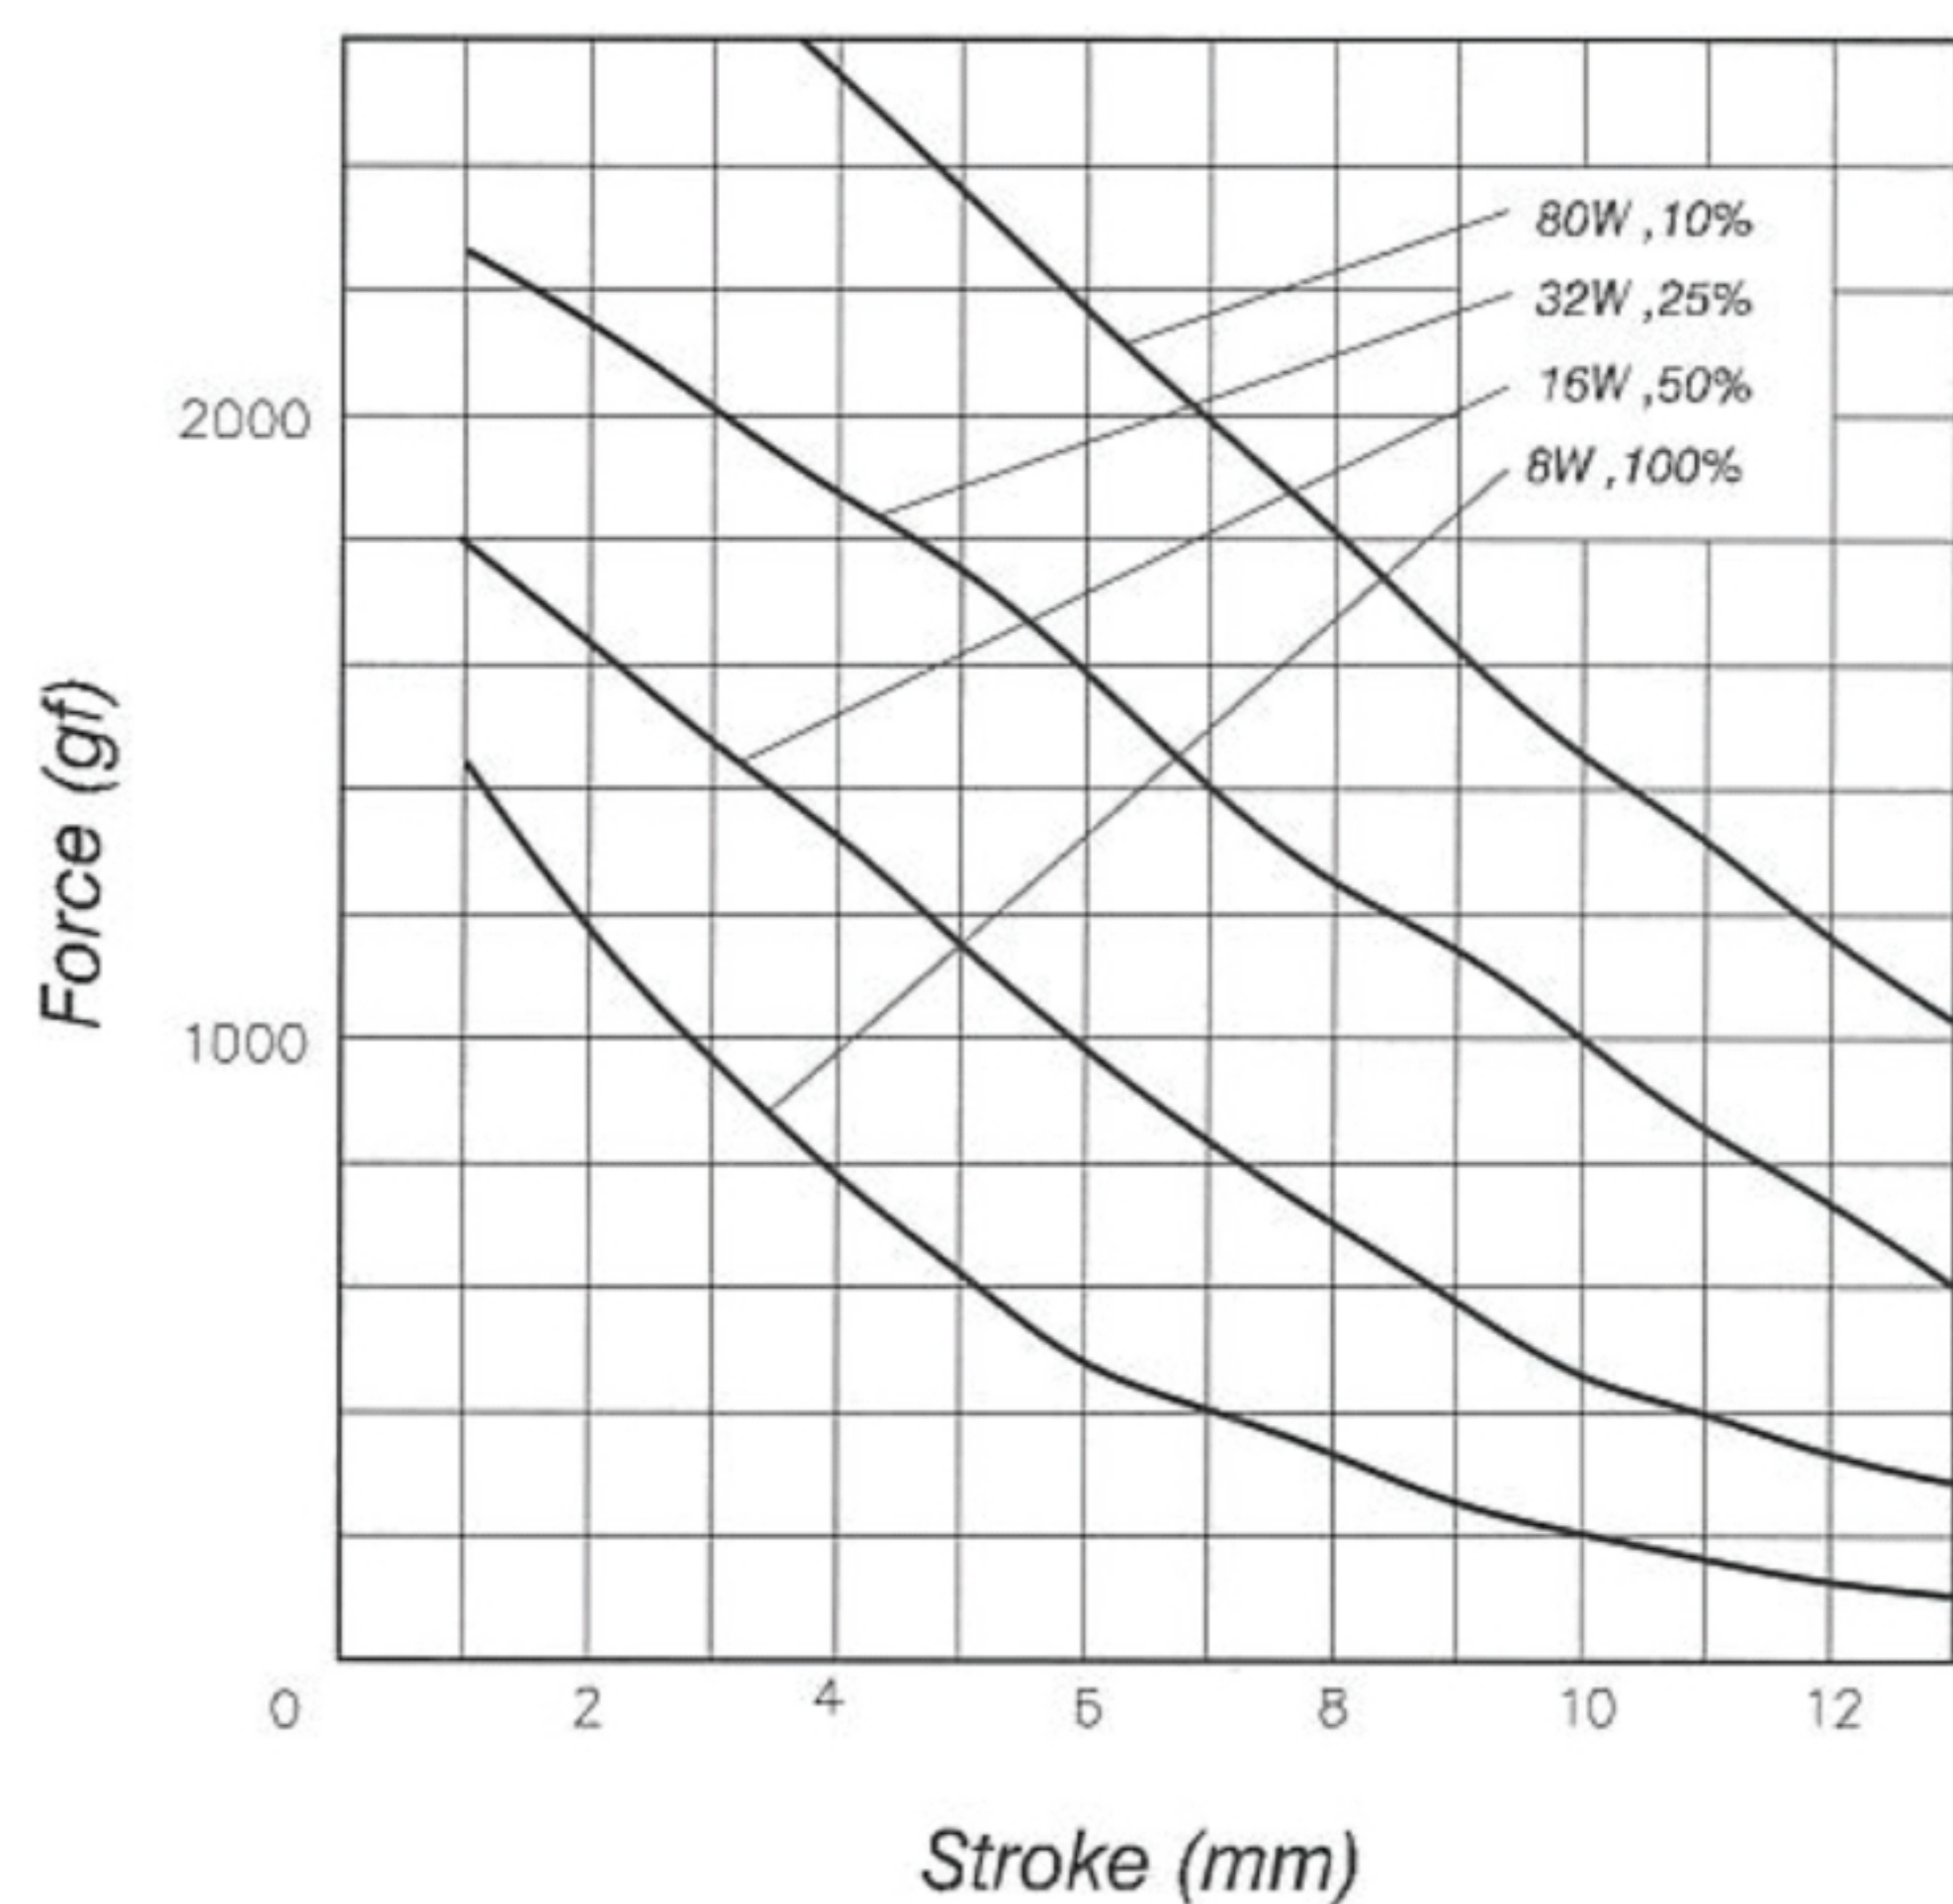

AMPERE-TURNS Vs FORCE 安-匝 / 吸引力

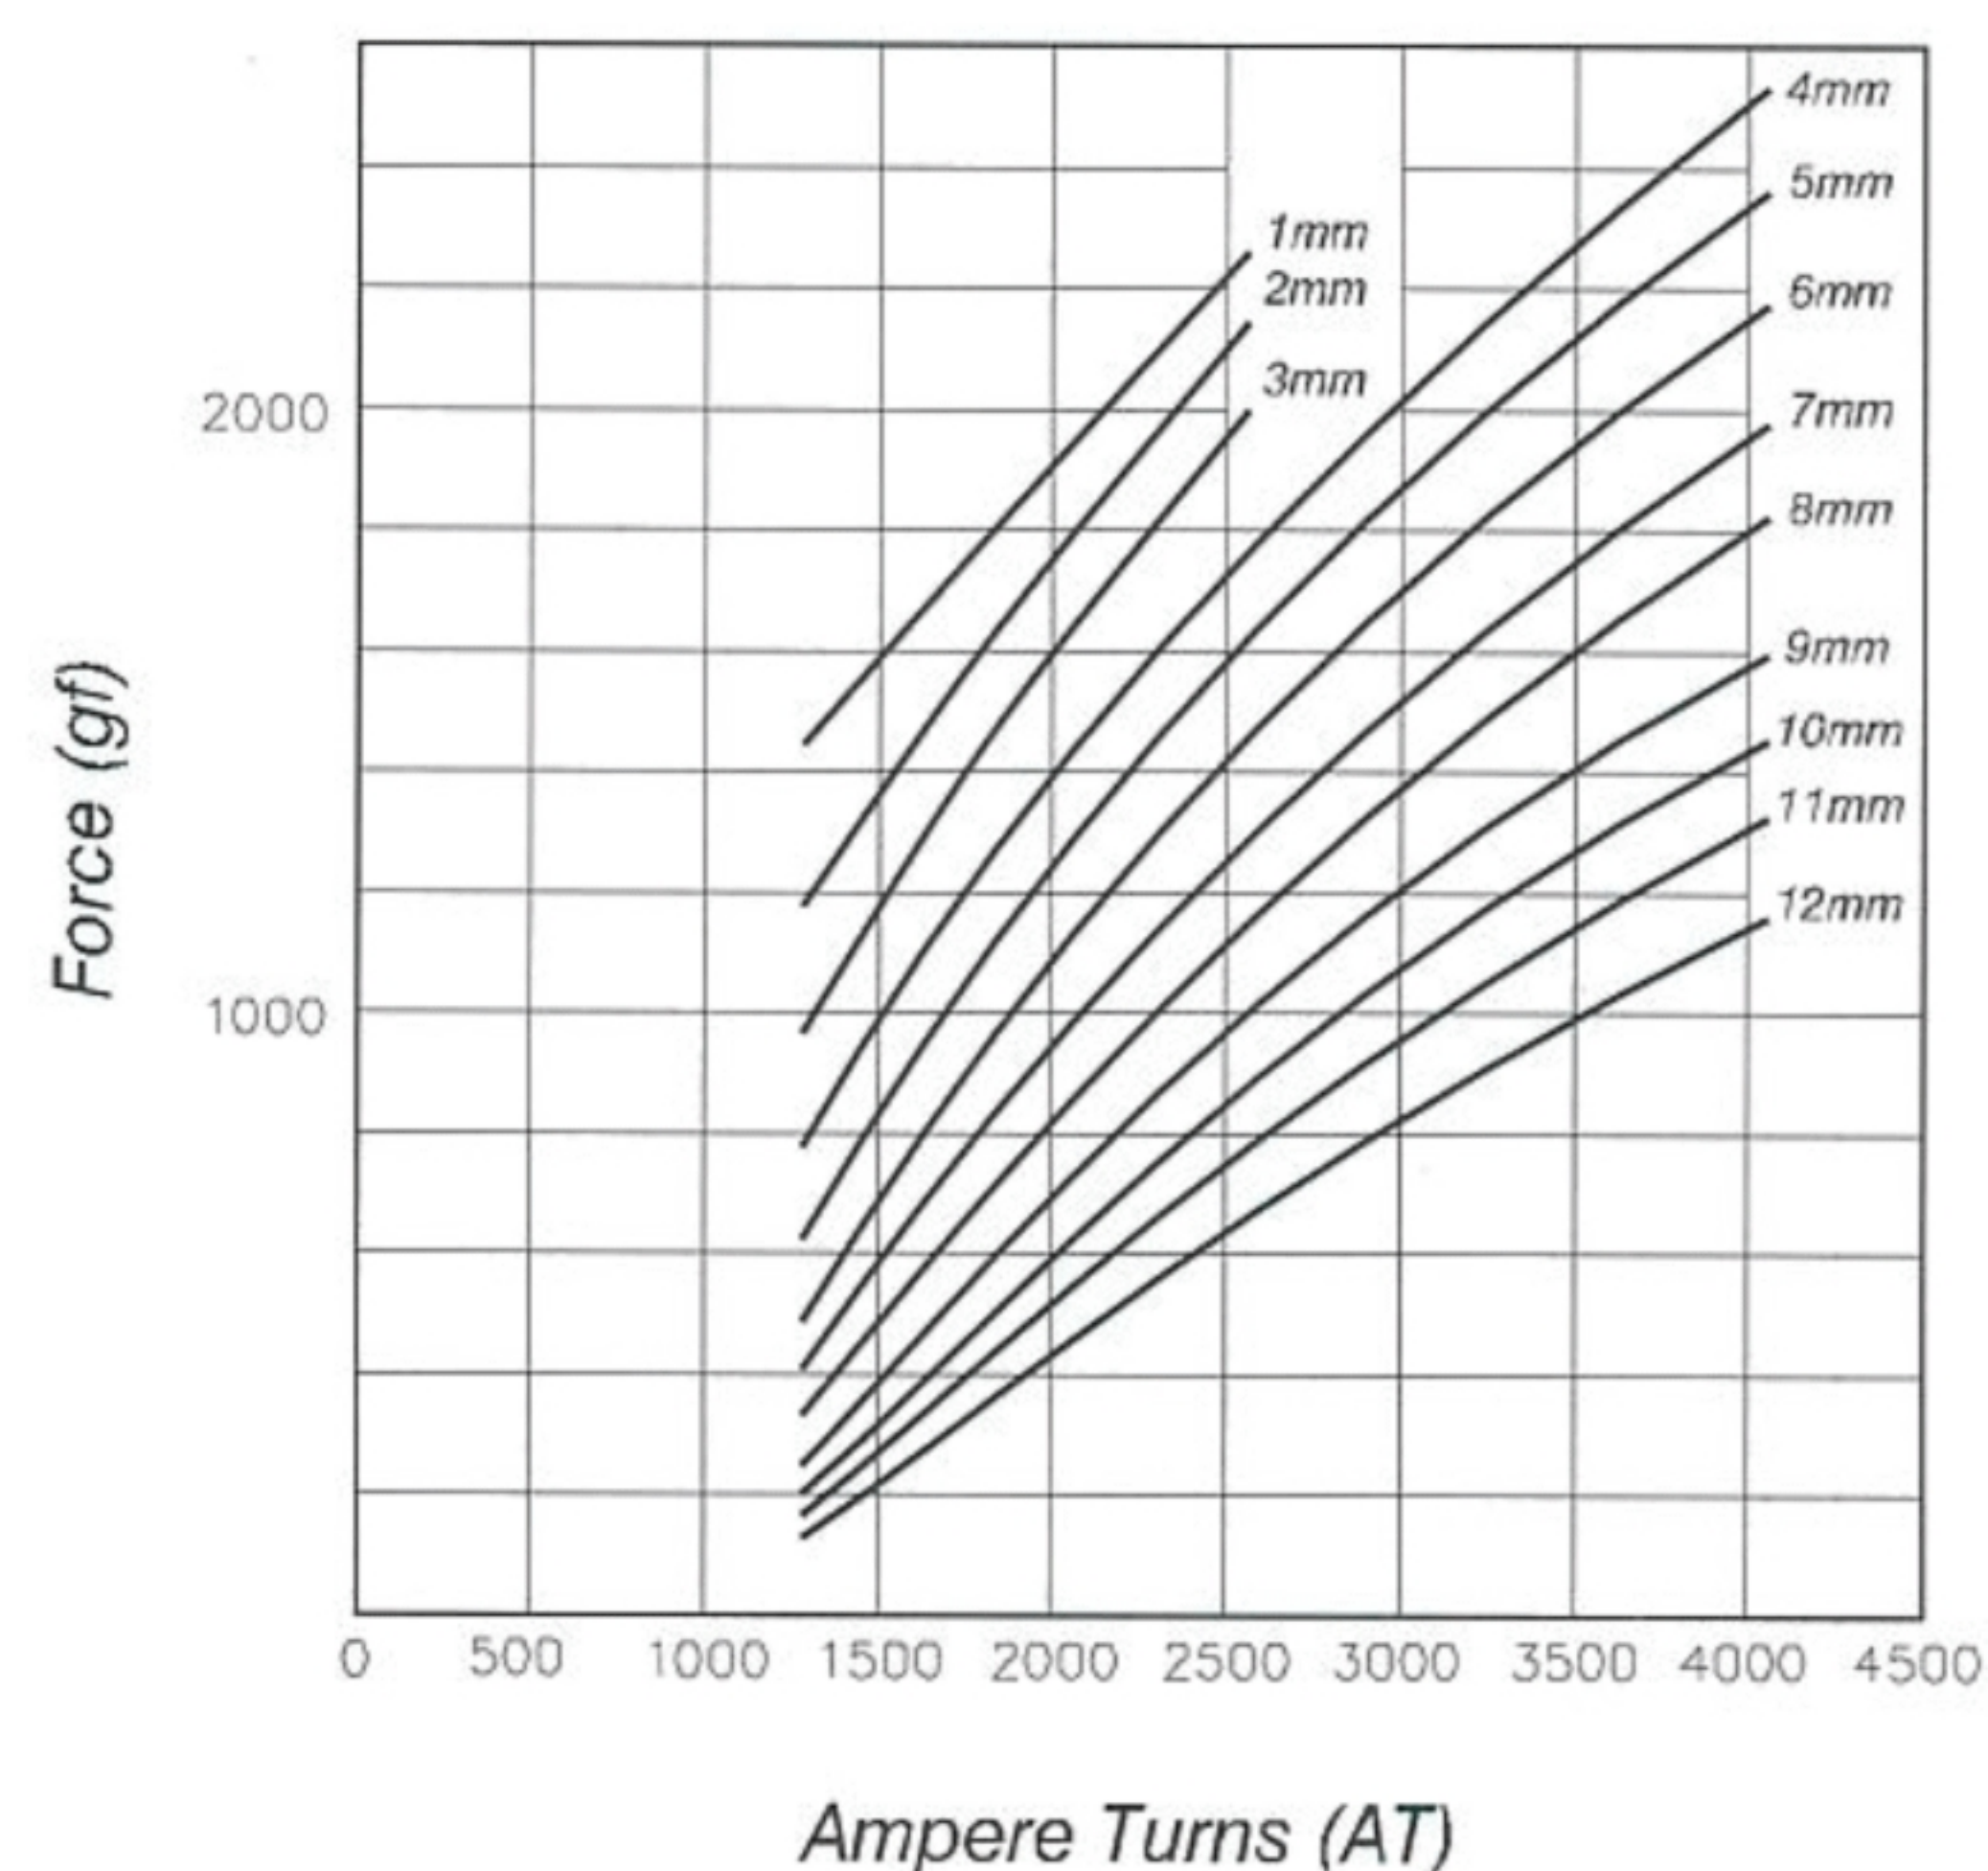

COIL DATA 线圈资料

Duty cycle (%) = $\frac{\text{"ON" time}}{\text{"ON" time} + \text{"OFF" time}} \times 100\%$ 作动周期(%) = $\frac{\text{ON 时间}}{\text{ON 时间} + \text{OFF 时间}} \times 100\%$			Continuous (100%) 连续 (100%)	Or less (50%) 间断 (50%)	Or less (25%) 间断 (25%)	Or less (10%) 间断 (10%)
MAX. "on" time in seconds 最大 ON 时间 (秒)			∞	140	50	9
Watts at 20°C 瓦特数(W) (在 20°C)			8	16	32	80
Ampere-turns at 20°C AT 值 (在 20°C)			1240	1750	2480	3958
Type no.	Resistance (20°C) Ω ± 10%	No. turns	Volts DC 电 压			
型号	阻 值(Ω) ± 10%	绕线圈数				
HTO-1564S06AA	4.5	950	6	8.5	12	19
HTO-1564S12AA	18	1900	12	17	24	38
HTO-1564S24AA	72	3750	24	34	48	76
HTO-1564S48AA	288	7440	48	68	96	152